



Flachsteckhülsen Female disconnect terminals

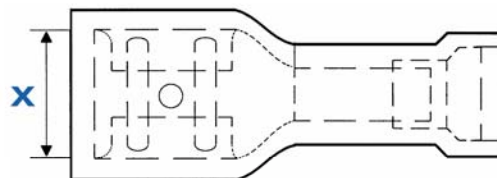

Flachsteckhülsen, vollisoliert Female disconnect terminals, fully insulated

Bezeichnung	mm ²	AWG	Bestell-Nr./Farbcode	Maße (x)	Stück
Description	mm ²	AWG	Item no./colour code	Dimensions (x)	Pieces
FHV 2,8 x 0,5-1	0,5-1	20-18	V70FV004003	2,8 x 0,5 mm	100
FHV 2,8 x 0,8-1	0,5-1	20-18	V70FV004004	2,8 x 0,8 mm	100
FHV 4,8 x 0,5-1	0,5-1	20-18	V70FV004005	4,8 x 0,5 mm	100
FHV 4,8 x 0,8-1	0,5-1	20-18	V70FV004006	4,8 x 0,8 mm	100
FHV 6,3 x 0,8-1	0,5-1	20-18	V70FV004001	6,3 x 0,8 mm	100
FHV 4,8 x 0,5-2,5	1,5-2,5	16-14	V70FV004007	4,8 x 0,5 mm	100
FHV 4,8 x 0,8-2,5	1,5-2,5	16-14	V70FV004008	4,8 x 0,8 mm	100
FHV 6,3 x 0,8-2,5	1,5-2,5	16-14	V70FV004002	6,3 x 0,8 mm	100
FHV 6,3 x 0,8-6	4-6	12-10	V70FV004009	6,3 x 0,8 mm	100



Flachsteckhülsen mit Abzweig, teilisoliert Piggy back disconnect terminals, pre-insulated

Bezeichnung	mm ²	AWG	Bestell-Nr./Farbcode	Maße (w/u x t)	Stück
Description	mm ²	AWG	Item no./colour code	Dimensions (w/u x t)	Pieces
FHA 6,3 x 0,8-1	0,5-1	20-18	V70FP004001	6,6/6,3 x 0,8 mm	100
FHA 6,3 x 0,8-2,5	1,5-2,5	16-14	V70FP004002	6,6/6,3 x 0,8 mm	100
FHA 6,3 x 0,8-6	4-6	12-10	V70FP004003	6,6/6,3 x 0,8 mm	100