


KU 363N

KU Rotary switches 16-125A

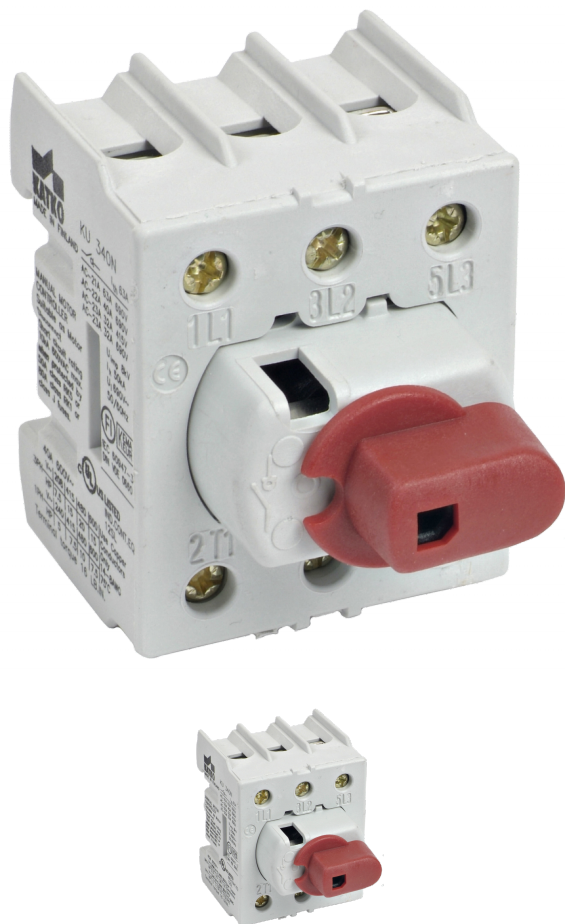

- Compact size
- DIN-rail mounting
- 3-pole and 4-pole KU-switches as standard
- 2-pole upon request
- 6-pole and 8-pole versions consist of two 3-pole or 4-pole KU-switches connected by a parallel kit
- Switch technology by means of silver contacts ensures safe and durable operation
- 4-pole versions with early-make and late-break neutral pole
- Compatible with handles LK10 and LK11
- Shafts L=100/200/300 AD11 and L=100/200/300 AD11/VT
- Tested according to IEC 60947-3
- Available with **CCC certificate**, mention when ordering

Data subject to change without notice. Always confirm the data is correct from the seller.

Technical datasheet >>



Product details

SKU	KU 363N
AC-22 400/415 V (A)	63 A
AC-22 690 V (A)	63 A
AC-23 400/415 V (A/kW)	40 A / 22 kW
AC-23 690 V (A/kW)	40 A / 37 kW

Dimensional drawing

Cable Area to Switch**Terminal (mm²) / Bolt size****E-Number** 3600723**EAN** 6419410214602**Number of Poles** 3**Operation** Rotary**Switch type** Load Break Switch**Weight (kg)** 0.2