


KU 316N

KU Rotary switches 16-125A

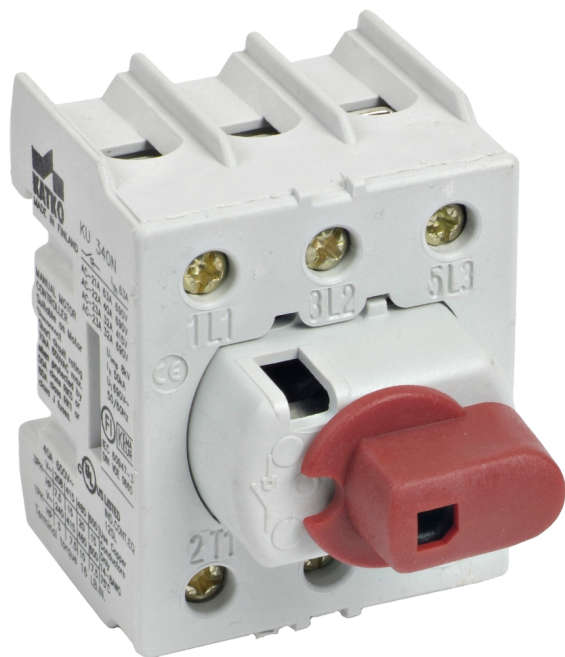

Data subject to change without notice. Always confirm the data is correct from the seller.

- Compact size
- DIN-rail mounting
- 3-pole and 4-pole KU-switches as standard
- 2-pole upon request
- 6-pole and 8-pole versions consist of two 3-pole or 4-pole KU-switches connected by a parallel kit
- Switch technology by means of silver contacts ensures safe and durable operation
- 4-pole versions with early-make and late-break neutral pole
- Compatible with handles LK10 and LK11
- Shafts L=100/200/300 AD11 and L=100/200/300 AD11/VT
- Tested according to IEC 60947-3
- Available with **CCC certificate**, mention when ordering

Technical datasheet >>



Product details

SKU	KU 316N
AC-22 400/415 V (A)	16 A
AC-22 690 V (A)	16 A
AC-23 400/415 V (A/kW)	16 A / 7.5 kW
AC-23 690 V (A/kW)	16 A / 11 kW

Dimensional drawing

Cable Area to Switch

Terminal (mm2) / Bolt size

E-Number	3600721
EAN	6419410214305
Number of Poles	3
Operation	Rotary
Switch type	Load Break Switch
Weight (kg)	0.19

